






AGGRESSIVE
EQUIPMENT

PORTABLE PIPE LATHES

2" I.D. TO 80" O.D.






TOUGH

-  Nitride finish to prevent corrosion
-  Tool slides made of high strength alloy steel with high phos-nickel finish
-  4140 preheated steel frame design






SIMPLE

-  Machine quickly splits to mount around O.D. of in-line pipe
-  Quick change leg design
-  One man can easily set up in minutes




VERSATILE

-  Optional light weight design
-  Cutting speed from .002" per revolution to 0.12"
-  Can be mounted on straight run pipe or elbows

PORTABLE PIPE LATHES 2" TO 80"

| Machine Size | I.D. | O.D. | Machine Height | Cut-Line | # of Legs | Machine Weight - lbs. | Light Weight - lbs. |
|--------------|-------|--------|----------------|----------|-----------|-----------------------|---------------------|
| 2 | 2.5 | 2.7 | 3,791 | 5,317 | 3 | 20 | N/A |
| 4 | 4,750 | 9,250 | 3,185 | 5,056 | 4 | 38 | N/A |
| 6 | 7,4 | 13,5 | 3,13 | 4,875 | 4 | 72,5 | 58 |
| 8 | 9,4 | 15,5 | 3,13 | 4,875 | 4 | 85,5 | 68 |
| 10 | 11,4 | 17,5 | 3,13 | 4,875 | 4 | 93 | 74 |
| 12 | 13,4 | 19,5 | 3,13 | 4,875 | 4 | 115 | 92 |
| 14 | 15 | 21 | 3,13 | 4,875 | 4 | 121,5 | 97 |
| 16 | 17 | 23 | 3,13 | 4,875 | 4 | 135 | 108 |
| 18 | 19 | 25 | 3,13 | 4,875 | 4 | 147 | 118 |
| 20 | 21 | 27 | 3,13 | 4,875 | 4 | 156 | 125 |
| 22 | 23 | 29 | 3,13 | 4,875 | 4 | 175 | 140 |
| 24 | 25 | 31 | 3,13 | 4,875 | 4 | 189 | 151 |
| 26 | 27 | 33 | 3,25 | 4,875 | 4 | 206 | N/A |
| 28 | 29 | 35 | 3,25 | 4,875 | 4 | 225 | N/A |
| 30 | 31 | 37 | 3,25 | 4,875 | 4 | 241 | N/A |
| 32 | 33 | 39 | 3,25 | 4,875 | 4 | 257 | N/A |
| 34 | 35 | 41 | 3,25 | 4,875 | 4 | 273 | N/A |
| 36 | 37 | 43 | 3,25 | 4,875 | 4 | 289 | N/A |
| 38 | 39 | 45 | 3,25 | 4,875 | 8 | 305 | N/A |
| 40 | 41 | 47 | 3,25 | 4,875 | 8 | 321 | N/A |
| 42 | 43 | 49 | 3,25 | 4,875 | 8 | 337 | N/A |
| 44 | 45 | 51 | 3,25 | 4,875 | 8 | 353 | N/A |
| 46 | 47 | 53 | 3,25 | 4,875 | 8 | 369 | N/A |
| 48 | 49 | 55 | 3,25 | 4,875 | 8 | 385 | N/A |
| 50 | 51 | 57 | 3,25 | 4,875 | 8 | 401 | N/A |
| 52 | 53 | 59 | 3,25 | 4,875 | 8 | 417 | N/A |
| 62 | 63 | 69 | 3,25 | 4,875 | 8 | 590 | N/A |
| 70 | 71 | 78,060 | 4,406 | 6,292 | 8 | 850 | N/A |
| 80 | 81 | 88,060 | 4,406 | 6,292 | 8 | 1000 | N/A |

ATTACHMENTS

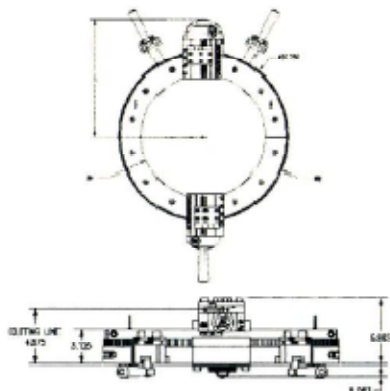

| | |
|----------------------------|--|
| Bridge Slide | Capable of single pointing, counter boring, and deep boring. |
| 4" Tool Slides | Fits any size split frame. Slide can sever bevel and hold counter bore attachment. |
| 5" Tool Slides | Fits any size split frame. Slide can sever bevel and hold counter bore attachment. |
| 6" Tool Slides | Fits any size split frame. Slide can sever bevel and hold counter bore attachment. |
| 10" Tool Slides | Fits any size split frame. Slide can sever bevel and hold counter bore attachment. |
| 4" Counter Bore Attachment | Standard Counter bore attachment. Mounts to any tool slide. |
| Deep Boring Attachment | Bores up to 8" deep. |
| Heavy Wall Tool Slide | Used for cutting over 3" wall thickness. Tool is 2" wide for extra rigidity. |
| Front Drive Gear Box | Relocates motor to front of machine in low rear clearance circumstances. |